

The Summit Insert

STANDARD FEATURES

- User friendly one-touch operation
- Straight-in fuel loading
- Air wash system for super clean ceramic glass
- Extended Burn Technology (EBT)
- Temperature actuated 160 cfm variable speed blower
- Temperature bypass switch
- 304 Stainless Steel baffle, insulation cover, rails and flame shield
- Inside and outside air combustion capable
- Reliable, durable, non-catalytic technology
- Floating firebox for extended stove life

CHOICES

- Arched door available in Gold, Nickel, Brushed Nickel or Metallic Black
- Embossed Surround
Standard size (48 3/4" w x 32" h)
- Plain Surround
Oversized (52 3/4" w x 34" h)
- Surround trim in Gold, Nickel, or Metallic Black



EXTENDED BURN TECHNOLOGY (EBT)

With EBT, a full load of wood will comfortably last throughout the night. EBT is available exclusively in Pacific Energy Summit Wood Stoves and Summit Fireplace Inserts. (See page 23)


DOOR FINISHES



Arched Doors are available in Gold, Nickel, Brushed Nickel or Metallic Black.

Did you know that up to 80% of the heat from your open fireplace goes straight up your chimney? Pacific Energy's Summit Insert, the only insert with patented Extended Burn Technology gives you up to ten hours of burn for a full night of heat. The Summit Insert's extremely efficient Heat Extraction System transfers the maximum amount of heat to your room, over the longest time. And unlike an open fire, you control the heat output. A one-touch control quickly adjusts the heat to your desired comfort level.

Heating Capacity		3,000 sq.ft.*
HEAT OUTPUT	Cord Wood	97,000 BTU
	EPA Test Fuel	37,501 BTU
Efficiency		72.5%**
Emissions		3.56 gm/hr.
Log Size		20 inches Max.

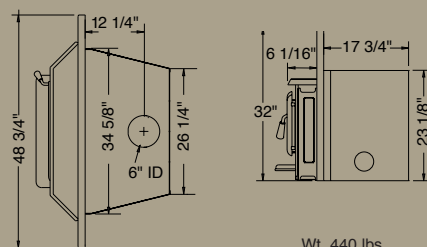

Wt. 440 lbs

* Figures will vary depending on type of wood, floor plan, house layout, heat loss of home, and geographical location.
**Oregon DEQ results may vary due to wood size and moisture content.